

Http://www.gigalight.com.cn

Optical Network Transceiver Innovator

# **3G-SDI Video SFP Tx 1310nm 20km Optical Transmitter**

#### **Features**

- HD-SDI SFP Transmitter available
- SD-SDI SFP Transmitter available
- 3G-SDI SFP Transmitter available
- SMPTE 297-2006 Compatible.
- Metal enclosure for Lower EMI
- 1310nm DFB laser
- Supports video pathological patterns for SD-SDI, HD-SDI and 3G-SDI
- Non-MSA Pinout
- Digital Diagnostic functions available through the I2C interface
- Compatible with RoHS
- +3.3V single power supply
- Operating case temperature:

Standard: 0 to +70°C

#### **Applications**

- SMPTE 297-2006 Compatible Electrical-to-Optical Interfaces.
- HDTV/SDTV Service Interfaces.

### **Description**

The video series transceivers are high performance, cost effective modules for duplex video transmission application over single mode fiber.

The transmitter is designed to transmit data rates from 50Mbps to 2.97Gbps and is specifically designed for robust performance in the presence of SDI pathological patterns for SMPTE 259M, SMPTE 344M, SMPTE 292M and SMPTE 424M serial rates. The module is fully compliant with SMPTE 297M-2006.

The transmitter is consists of two sections: a DFB laser transmitter and MCU control unit. All



Http://www.gigalight.com.cn

Optical Network Transceiver Innovator

modules satisfy class I laser safety requirements.

The transmitter are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

**Absolute Maximum Ratings** 

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	-0.5	4.5	V
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	-	5	85	%

**Recommended Operating Conditions** 

to commendate of containing conta						
Parameter		Symbol	Min	Typical	Max	Unit
Operating Case Temperature	Standard	Tc	0		+70	°C
operating case reimperature						°C
Power Supply Voltage		Vcc	3.13	3.3	3.47	V
Power Supply Current		lcc			350	mA
Data Rate				3		Gbps

Optical and Electrical Characteristics

Parameter	Symbol		Min	Typical	Max	Unit	Notes
	Transmitter						
Centre Waveleng	jth	λc	1260	1310	1360	nm	
Spectral Width (-20	)dB)	σ			1	nm	
Side Mode Suppression Ratio		SMSR	30			dB	
Average Output Power		Pout	-6	-2	0	dBm	1
Extinction Ratio	)	ER	5			dB	
Rise/Fall Time (20%~80%)	SD-SDI	1/1.5			1500		
	HD-SDI	tr/tf			270	ps	2
	3G-SDI				135		



Http://www.gigalight.com.cn

Optical Network Transceiver Innovator

PRBS and SD-SDI 70 200  colour HD-SDI 50 135  Total bar 3C SDI 70 100	
Total	
Total har so on	
36-501 70 100	
Output ps  Jitter SD-SDI 200 300	
pathological HD-SDI 115	
3G-SDI 120	
Data Input Swing Differential V <sub>IN</sub> 400 1800 mV 3	
Input Differential Impedance $Z_{IN}$ 90 100 110 $\Omega$	
Disable 2.0 Vcc V	
Enable 0 0.8 V	
Fault 2.0 Vcc V	
Normal 0 0.8 V	

#### Notes:

- 1. The optical power is launched into SMF.
- 2. Rise and fall times, 20% to 80%, are measured following a fourth-order Bessel-Thompson filter with a bandwidth of 0.75 xclock frequency corresponding to the serial data rate 3. PECL input, internally AC-coupled and terminated.
- 4. Internally AC-coupled.

**Timing and Electrical** 

Parameter	Symbol	Min	Typical	Max	Unit
Tx Disable Negate Time	t_on			1	ms
Tx Disable Assert Time	t_off			10	μs
Time To Initialize, including Reset of Tx Fault	t_init			300	ms
Tx Fault Assert Time	t_fault			100	μs
Tx Disable To Reset	t_reset	10			μs
Serial ID Clock Rate	f_serial_clock			280	KHz
MOD_DEF (0:2)-High	V <sub>H</sub>	2		Vcc	V
MOD_DEF (0:2)-Low	V <sub>L</sub>			0.8	V



Http://www.gigalight.com.cn

Optical Network Transceiver Innovator

**Diagnostics Specification** 

Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70	°C	±3°C	Internal / External
Voltage	3.0 to 3.6	V	±3%	Internal / External
Bias Current	0 to 100	mA	±10%	Internal / External
TX Power	-6 to 0	dBm	±3dB	Internal / External

### **I2C Bus Interface**

The I2C bus interface uses the 2-wire serial CMOS E2PROM protocol. The serial interface meets the following specifications:

- 1. Support a maximum clock rate of 280Khz.
- 2. Input/Output levels comply with LVCMOS/LVTTL or compatible logics.

Low: 0 – 0.8 V High: 2.0 – 3.3 V Undefined: 0.8 – 2.0 V

## **Pin Definitions**

Pin Diagram

Top of I	Board		n of Board wed through top of boa	ard)
20	TX1_DIS	1	VEE_TX1	
19	TD1-	2	TX1_FAULT	
18	TD1+	3	NC	
17	VEE_TX1	] 4	VEE_TX1	
16	VCC_TX1	5	I <sup>2</sup> C CLK	
15	NC	6	I <sup>2</sup> C DATA	
14	NC	]   7	NC	
13	NC	8	NC	
12	NC	9	NC	
11	NC	]   10	NC	
		1 1		

# **Pin Descriptions**



Http://www.gigalight.com.cn

Optical Network Transceiver Innovator

Pin	Signal Name	Description	Plug Seq.	Notes
1	VEE_TX1	Transmitter 1 Ground	1	
2	TX1_FAULT	Transmitter 1 Fault Indication	3	Note 1
3	NC	Not Connected		
4	VEE_TX1	Transmitter 1 Ground	1	
5	I2C CLK	SCL Serial Clock Signal	3	Note 3
6	I2C DATA	SDA Serial Data Signal	3	Note 3
7	NC	Not Connected		
8	NC	Not Connected		
9	NC	I Not Connected		
10	NC	Not Connected		
11	NC	Not Connected		
12	NC	Not Connected		
13	NC	Not Connected		
14	NC	Not Connected		
15	NC	Not Connected		
16	VCC_TX1	Transmitter Power 1 Supply	2	
17	VEE_TX1	Transmitter 1 Ground	1	
18	TD1+	Transmit 1 Data In 3		Note 4
19	TD1-	Inv. Transmit 1 Data In	3	Note 4
20	TX1_DIS	Transmitter 1 Disable	3	Note 2

#### Notes:

Plug Seq.: Pin engagement sequence during hot plugging.

- 1) TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
- 2) TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a  $4.7k\sim10k\Omega$  resistor. Its states are:

Low (0 to 0.8V): Transmitter on (>0.8V, < 2.0V): Undefined


High (2.0 to 3.465V): Transmitter Disabled Open: Transmitter Disabled

- 3) They should be pulled up with a 4.7k~10kΩ resistor on the host board. The pull-up voltage shall be VCC\_TX1or VCC\_TX2. I2C CLK is the clock line of two wire serial interface for serial ID I2C DATA is the data line of two wire serial interface for serial ID
- 4) TD1/2-/+: These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.

Http://www.gigalight.com.cn

Optical Network Transceiver Innovator

#### **Mechanical Dimensions**

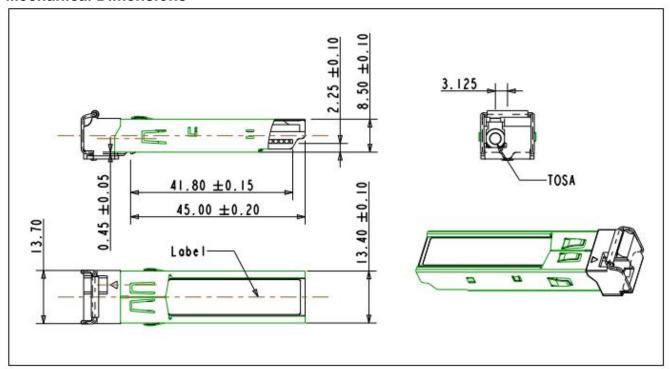

## **Ordering information**

Part Number		Product Description
GHT-313G-L2CD	1310nm, 3Gbps, 20km, Non-MSA Pinout	0°C ~ +70°C, With Digital Diagnostic Monitoring,

### **Important Notice**

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by GIGALIGHT before they become applicable to any particular order or contract. In accordance with the GIGALIGHT policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of GIGALIGHT or others. Further details are available from any GIGALIGHT sales representative.

E-mail: <u>sales@gigalight.com.cn</u>
Web : <u>http://www.gigalight.com.cn</u>