

100GE/OTU4 CFP2 LR4 Rx 10km Optical Receiver P/N: GF2R-S101-LR4C

Features

- ◆ Transmission data rate up to 28Gbps per channel
- ◆ 4 channels PIN ROSA (without transmitter)
- ◆ 4 parallel electrical serial interface and AC coupling of CML signals
- ◆ RX output CDR retiming
- ◆ Low power consumption < 3W
- ◆ Hot-pluggable CFP2 form-factor
- ◆ Up to reach 10km for G.652 SMF
- ◆ Duplex LC receptacles
- ◆ MDIO management interface
- ◆ Operating case temperature range 0°C to +70°C
- ◆ 3.3V power supply voltage
- ◆ RoHS-6 compliant (lead free)




Applications

- ◆ IEEE 802.3ba 100GBASE-LR4
- ◆ OTN OTU4
- ◆ Deep Packet Inspection (DPI)

Description

The Gigalight 100GE/OTU4 CFP2 LR4 Rx 10km optical receiver (GF2R-S101-LR4C) is a hot-pluggable form-factor module designed for 100-Gigabit Ethernet and OTN OTU4 applications with 100GBASE-LR4 compliant optical interface, CAUI electrical interface and MDIO module management interface. The CFP2 optical receiver module can be used in Deep Packet Inspection (DPI) applications.

The module de-multiplexes a 112Gb/s optical input into 4 channels of LAN-WDM optical signals and then converts them to 4 output channels of electrical data. The central wavelengths of the 4 LAN-WDM channels are 1295.56, 1300.05, 1304.58 and 1309.14 nm as members of the LAN-WDM wavelength grid defined in IEEE 802.3ba. The high-sensitivity PIN receivers provide superior performance for 100-Gigabit Ethernet applications up to 10km links and compliant to optical interface with IEEE 802.3ba Clause 88 100GBASE-LR4 requirements.

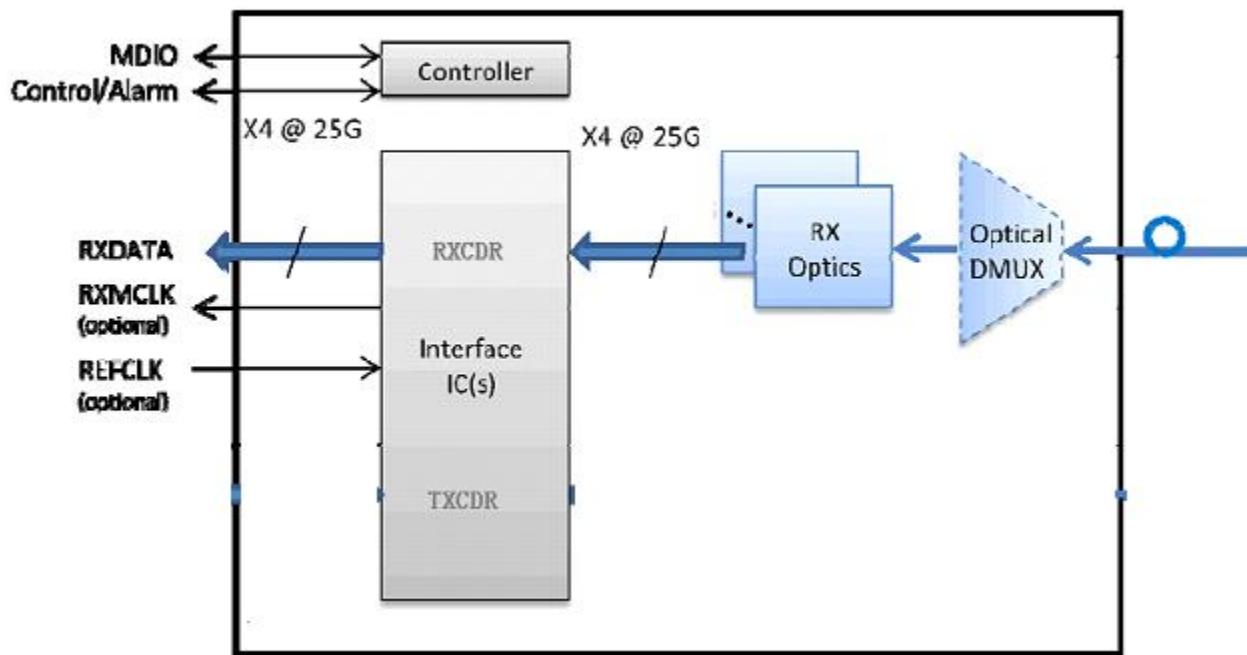

100GE CFP2 LR4 single receiver Module Block Diagram

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Supply Voltage	VCC3	V	-0.5	3.6
Storage Temperature	T _s	°C	-40	85
Operating Case Temperature	T _c	°C	0	70
Relative Humidity (Non condensation)	-	%	5	95

Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Operating Case Temperature	T _c	°C	0	-	70
Supply Voltage	VCC	V	3.13	3.3	3.47
Supply Current	I _{CC}	A	-	-	0.9
Power Dissipation	-	W	-	-	3

Optical Characteristics

(Tested under recommended operating conditions, unless otherwise noted)

Parameter	Symbol	Unit	Value		
			Min	Typ	Max
Optical Receiver Characteristics					
Receiver Sensitivity in OMA for Each Lane(100GbE)	SOMA	dBm	-	-	-8.6
Receiver Sensitivity for Each Lane(OTU4)					-10.8
Los Assert		dBm			-12
Los De-assert		dBm	-19		
Los Hysteresis		dBm		1	

Electrical Characteristics

(Tested under recommended operating conditions, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Note
Receiver						
Differential Data Output Swing	V _{out,pp}	mV	400	-	800	
Differential Signal Output Resistance		Ω	80	-	120	
Differential Signal Input Resistance		Ω	80	-	120	
LOS Fault	-	V	V _{dd3} -0.5	-	V _{dd3}	
LOS Normal	-	V	0	-	+ 0.5	1
Note1: Vdd3 is host +3.3V power supply.						

Low Speed Electrical Interface

Parameter	Symbol	Unit	Min	Max	Note
Input High Voltage	V _{IH}	V	2.0	V _{cc3} + 0.3	
	V _{IL}	V	-0.3	0.8	
Input Low Voltage	V _{OH}	V	V _{dd3} -0.5	V _{dd3} + 0.3	1
	V _{OL}	V	0.0	0.4	
Input Leakage Current	V _{IH}	V	V _{dd3} *0. 7	V _{dd3} + 0.5	1
	V _{IL}	V	-0.3	V _{dd3} *0.3	
Output High Voltage (IOH = 100uA)	V _{OH}	V	V _{dd3} -0.5	V _{dd3} + 0.3	

	VOL	V	0.0	0.4	
Output low Voltage (IOH = 100uA)	IL	uA	-10	10	
Minimum Pulse Width of Control Pin Signal		KHz		400	

1.2V LVC MOS Electrical Characteristics

Input High Voltage	1.2VIH	V	0.84	1.5	
Input Low Voltage	1.2VIL	V	-0.3	0.36	
Input Leakage Current	1.2IIN	uA	-100	+ 100	
Output High Voltage	1.2V0H	V	1.0	1.5	
Output Low Voltage	1.2V0L	V	-0.3	0.2	
Output High Current	1.2I0H	mA		-4	
Output Low Current	1.2I0L	mA	+4		
Input Capacitance	Ci	pF		10	

Hardware Control Pins

The CFP2 Module support real-time control functions via hardware pins, listed in the following table:

Hardware Control Pins

Pin#	Symbol	Description	I/O	Logic	H	L	Pull-up/down
17	PRG_CNTL1	Programmable Control 1 MSA Default:TRXIC_RSTn , TX&RX ICs reset, "0":reset;"1"	I	3.3V LVC MOS	per CFP MSA Management Interface Specification		Pull-Up Note1
18	PRG_CNTL2	Programmable Control 2 MSA Default : Hardware Interlock LSB	I	3.3V LVC MOS			Pull-Up Note1
19	PRG_CNTL3	Programmable Control 3 MSA Default:Hardware Interlock MSB	I	3.3V LVC MOS			Pull-Up Note1
26	M0D_L0PWR	Module Low Power Mode	I	3.3V LVC MOS	Low Power	Enable	Pull-Up Note1
28	M0D_RSTn	Module Reset(Invert)	I	3.3V LVC MOS	Enable	Reset	Pull-Down Note2
24	TX_DIS	Transmitter Disable	I	3.3V LVC MOS	Disable	Enable	Pull-Up Note1

Note1: Pull-Up resistor (4.7KOhm to 10 KOhm) is located within the CFP2 module Note2: PuH-Down resistor (4.7KOhm to 10 kOhm) is located within the CFP2 module

Hardware Alarm Pins

The CFP Module supports alarm hardware pins listed in the following table: Hardware Alarm Pins

Pin#	Symbol	Description	I/O	Logic	H	L	Pull-up/down
20	PRG_ALRM1	Programmable Alarm 1 MSA Default:HIPWR_ON	O	3.3V LVC MOS			
21	PRG_ALRM3	Programmable Alarm 3 MSA Default: MOD_FAULT	O	3.3V LVC MOS			
22	MOD_ABS	Module Absent	O	3.3V LVC MOS			
27	RX_LOS	Receiver Loss of Signal	O	3.3V LVC MOS	Absent	Present	Pull-Down Note1
25	PRG_ALRM3	Receiver Loss of Signal	O	3.3V LVC MOS	Loss of Signal	OK	

Note1: Pull-Down resistor (<100ohm) is located within the CFP module. Pull-up should be located on the host

Management Interface Pins(MDIO)

The CFP Module supports alarm, control and monitor functions via an MDIO bus. The CFP MDIO pins are listed in

Pin#	Symbol	Description	I/O	Logic	H	L	Pull-up/down
29	GLB_ALRMn	Global Alarm	I	3.3V LVC MOS	Ok	Alarm	
32	MDIO	Management Data Input Output Bi-Directional Data	I/O	1.2V LVC MOS			
31	MDC	MDIO Clock	I	1.2V LVC MOS			
33	PRTADR0	MDIO Physical Port address bit0	I	1.2V LVC MOS	per document[5]	MDIO	
34	PRTADR1	MDIO Physical Port address bit1	I	1.2V LVC MOS			
35	PRTADR2	MDIO Physical Port address bit2	I	1.2V LVC MOS			

Hardware Signaling Pin Timing Requirements

Timing Parameters for CFP2 hardware Signal Pins are listed in the following table.

Parameter	Symbol	Min	Max	Unit	Notes&Conditions
Hardware MOD_LOPWR assert	t_MOD_LOPWR_assert		1	ms	Application Specific May depend on current state Condition when signal is applied .See Vendor Datasheet

Hardware MOD_LOPWR deassert	t_MOD_LOPWR_deassert		ms	Value is dependent upon module start-up time. Please See register " Maximum High-Power-up time " in "CFP MSA Management Interface Specification"
Receiver Loss of Signal Assert Time	t_loss_assert	100	us	Maximum value designed to support telecom applications
Receiver Loss of Signal De-Assert Time	t_loss_deassert	100	us	Maximum value designed to support telecom applications
Global Alarm Assert Delay Time	GLB_ALRMn_assert	150	ms	This is a logical "OR" of Associated MDIO alarm& status registers. Please see MDIO document for further details
Global Alarm De-assert Delay Time	GLB_ALRMn_deassert	150	ms	This is a logical "OR" of Associated MDIO alarm& status registers. Please see MDIO document for further details
Management Interface Clock Period	t_prd	250	ns	MDC is 4MHz rate
Host MDIO t_setup	t_setup	10	ns	
Host MDIO t_hold	t_hold	10	ns	
CFP MDIO t_delay	t_delay	0	175	ns
Initialization time from Reset	t_initialize		2.5	s
Transmitter Disabled(TX_DIS_asserted)	t_deassert	100	us	Application Specific
Transmitter Enabled(TX_DIS_asserted)	t_assert	100	ms	Value is dependent upon module start-up time. Please See register "Maximum TX-Turn-on Time" in "CFP MSA"

PIN#	Name	I/O	Logic	Description	Notes
1	GND				
2	(TX_MCLKn)	O	CML	For optical waveform testing.	
3	(TX_MCLKp)	O	CML	For optical waveform testing.	
4	GND				

5	N.C.				
6	N.C.				
7	3.3V_GND			3.3V Module Supply Voltage Return Ground can be	
8	3.3V_GND				
9	3.3V				
10	3.3V				
11	3.3V				
12	3.3V				
13	3.3V_GND				
14	3.3V_GND				
15	VND_IO_A	I/O		Module Vendor I/O A. Module Vendor I/O A.	
16	VND_IO_B	I/O		Module Vendor I/O B. Module Vendor I/O B.	
17	PRG_CNTL1	I	LVCMOS w/ PUR	Programmable Control 1 set over MDIO	
18	PRG_CNTL2	I	LVCMOS w/ PUR	Programmable Control 1 set over MDIO	
19	PRG_CNTL3	I	LVCMOS w/ PUR	Programmable Control 1 set over MDIO	
20	PRG_ALRM1	O	LVCMOS	Programmable Alarm Programmable Alarm	
21	PRG_ALRM2	O	LVCMOS	Programmable Alarm Programmable Alarm	
22	PRG_ALRM3	O	LVCMOS	Programmable Alarm Programmable Alarm	
23	GND				
24	TX_DIS	I	LVCMOS	Transmitter Disable for all lanes, "1" or NC = transmitter disabled, "0"=	
25	RX_LOS	O	LVCMOS	Receiver Loss of Optical Signal, "1": low optical signal, "0":	
26	MOD_LOPWR	I	LVCMOS w/ PUR	Module Low Power Mode. "1" or NC: module in low power	
27	MOD_ABS	O		Module Absent. "1" or NC: module absent, "0": module present	
28	MOD_RSTn	I	LVCMOS w/ PDR	Module Reset. "0" resets the module, "1" or NC = module	
29	GLB_ALRMn	O	LVCMOS	Global Alarm. "0": alarm condition in any MDIO Alarm register.	
30	GND				
31	MDC	I	1.2V CMOS	Management Data	
32	MDIO	I/O	1.2V CMOS	Management Data I/O	
33	PRTADR0	I	1.2V CMOS	MDIO Physical Port address bit 1	
34	PRTADR1	I	1.2V CMOS	MDIO Physical Port address bit 2	



35	PRTADR2	I	1.2V CMOS	MDIO Physical Port address bit 3	
36	VND_IO_C	I/O		Module Vendor I/O C. Do Not Connect!	
37	VND_IO_D	I/O		Module Vendor I/O D. Do Not Connect!	
38	VND_IO_E	I/O		Module Vendor I/O E. Do Not Connect!	
39	3.3V_GND				
40	3.3V_GND				
41	3.3V				
42	3.3V				
43	3.3V				
44	3.3V				
45	3.3V_GND				
30	GND				
31	MDC	I	1.2V CMOS	Management Data	
32	MDIO	I/O	1.2V CMOS	Management Data I/O	
33	PRTADR0	I	1.2V CMOS	MDIO Physical Port address bit 1	
34	PRTADR1	I	1.2V CMOS	MDIO Physical Port address bit 2	
35	PRTADR2	I	1.2V CMOS	MDIO Physical Port address bit 3	
36	VND_IO_C	I/O		Module Vendor I/O C. Do Not Connect!	
37	VND_IO_D	I/O		Module Vendor I/O D. Do Not Connect!	
38	VND_IO_E	I/O		Module Vendor I/O E. Do Not Connect!	
39	3.3V_GND				
39	3.3V_GND				
40	3.3V_GND				
41	3.3V				
42	3.3V				
43	3.3V				
44	3.3V				
45	3.3V_GND				
46	3.3V_GND				
47	N.C.				
48	N.C.				
49	GND				
50	(RX_MCLKn)	O	CML	For optical waveform testing. Not for	
51	(RX_MCLKp)	O	CML	For optical waveform testing. Not for	
52	GND				
53	GND				
54	N.C.				
55	N.C.				
56	GND				
57	RX0p	O	CML	Output Data	

58	RX0n	O	CML	Inverted Output Data	
59	GND				
60	RX1p	O	CML	Output Data	
61	RX1n	O	CML	Inverted Output Data	
62	GND				
63	N.C.				
64	N.C.				
65	GND				
59	GND				
60	RX1p	O	CML	Output Data	
61	RX1n	O	CML	Inverted Output Data	
62	GND				
63	N.C.				
64	N.C.				
65	GND				
70	RX2n	O	CML	Inverted Output Data	
71	GND				
72	RX3p	O	CML	Output Data	
73	RX3n	O	CML	Inverted Output Data	
74	GND				
75	N.C.				
76	N.C.				
77	GND				
78	NC				
79	NC				
80	GND				
81	N.C.				
82	N.C.				
83	GND				
84	TX0p	I	CML	Input Data	NC
85	TX0n	I	CML	Inverted Input Data	NC
86	GND				
87	TX1p	I	CML	Input Data	NC
88	TX1n	I	CML	Inverted Input Data	NC
89	GND				
90	N.C.				
91	N.C.				
92	GND				
93	N.C.				
94	N.C.				


95	GND					
96	TX2p	I	CML	Input Data	NC	
97	TX2n	I	CML	Inverted Input Data	NC	
98	GND					
99	TX3p	I	CML	Input Data	NC	
100	TX3n	I	CML	Inverted Input Data	NC	
101	GND					
102	N.C.					
103	N.C.					
104	GND					

Transmitter and Receiver Monitor Clock Characteristics




		Min	Typ	Max	Unit	Notes
Impedance	Zd	80	100	120	Ω	
Frequency			3220		MHz	1/8 of Network lane rate
Output Differential Voltage	VDIFF	400		1200	mV	Peak to Peak Differential
Clock Duty Cycle		40		60	%	

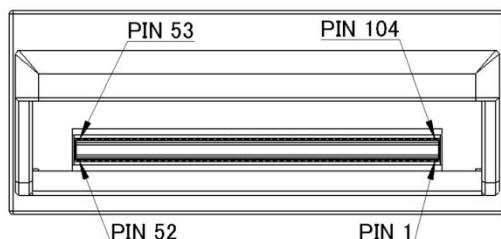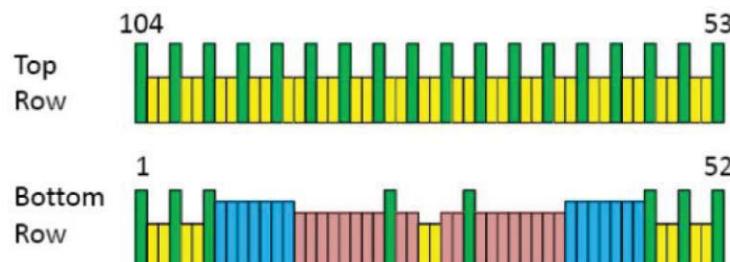
Pad Layout of the CFP2 module

Typical Application Circuit for Power Supply

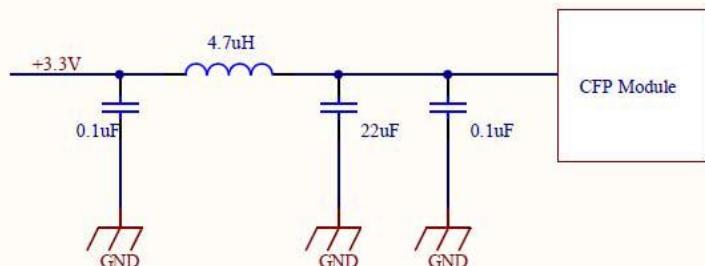

Mechanical Dimensions

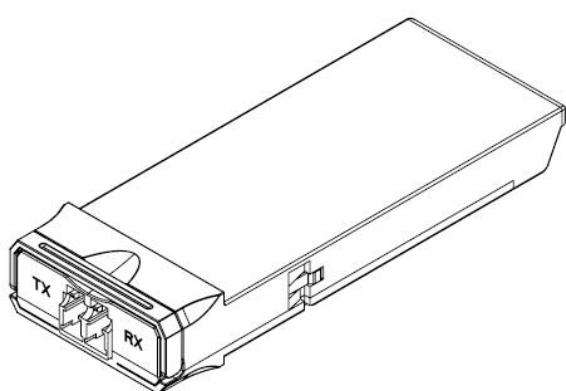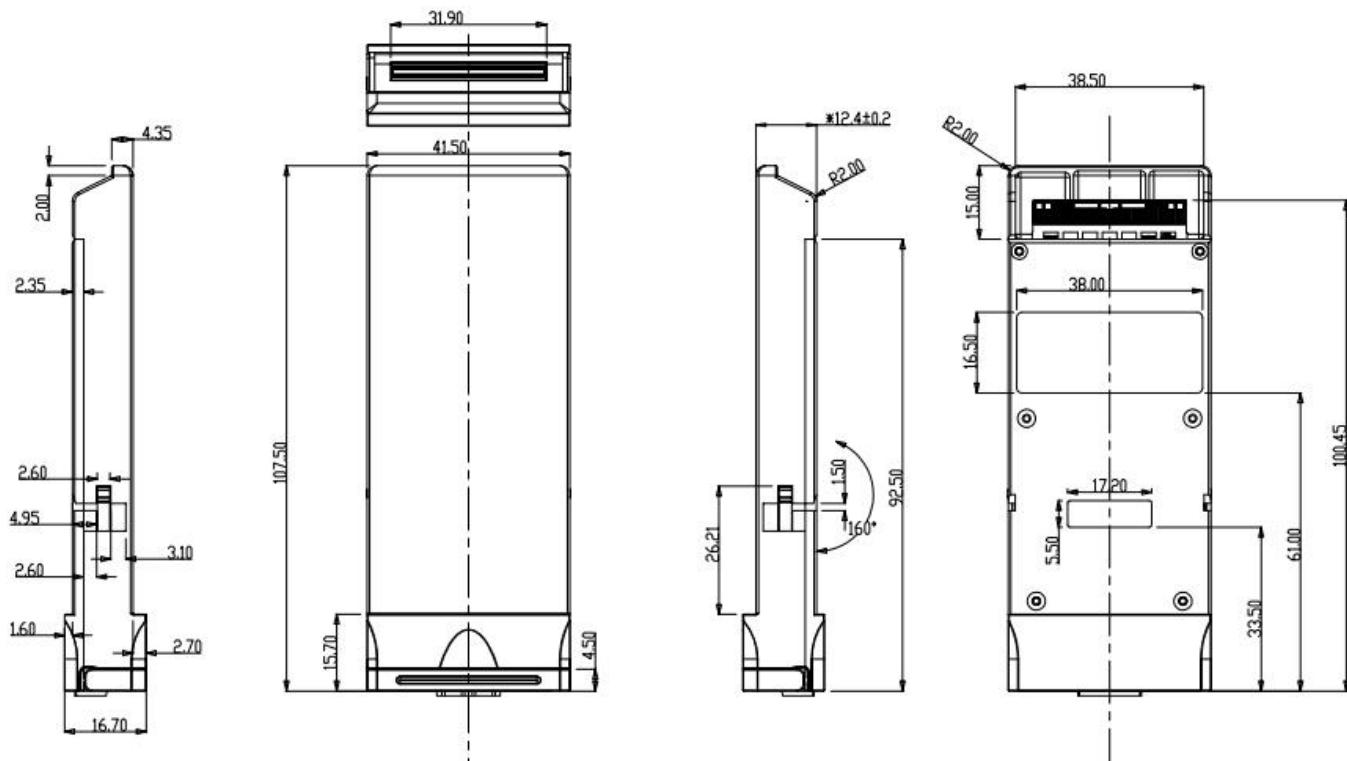

Ordering information

Part Number	Product Description
GF2R-S101-LR4C	100GE/OTU4 CFP2 LR4 Rx, w/o TOSA, 112Gb/s, up to reach 10km for G.652 SMF

Regulatory Compliance

Feature	Test Method	Performance
Laser Eye Safety	FDA 21 CFR 1040.10 and 1040.11 IEC 60825-1: 1994+ A11: 1996+ A2: 2001 IEC 60825-2: 2004 + A1: 2006 EN 60825-1:1994+A1:2002+A2:2001 EN 60825-2: 2004	Compliant with Class 1 laser product
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7 Human Body Model	Class 1 (>1.5kV)
Electrostatic Discharge (ESD) Immunity	IEC 61000-4-2: 2001	Class 2 (>4.0kV)
Electromagnetic Interference (EMI)	FCC Part 15 Subpart J Class B CISPR22:1997+A1:2000+A2:2002, Class B EN55022:1998+A1:2000+A2:2003, Class B	Compliant with standards

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by GIGALIGHT before they become applicable to any particular order or contract. In accordance with the GIGALIGHT policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of GIGALIGHT or others. Further details are available from any GIGALIGHT sales representative.

E-mail: sales@gigalight.com

Web : <https://www.gigalight.com/>