

50GE SFP56 Direct Attach Passive Copper Cables

GSS-PC560-XXC

Features

- ◆ Up to 56Gb/s (Support 28GBaud/s PAM4)
- ◆ Up to 3 meter transmission
- ◆ Hot-pluggable SFP 20PIN footprint
- ◆ Improved Pluggable Form Factor(IPF) compliant for enhanced EMI/EMC performance
- ◆ Compatible to SFP28 MSA and SFF-8432
- ◆ Compatible to IEEE802.3cd
- ◆ Power consumption <0.1 W
- ◆ Temperature Range: 0~ 70 °C
- ◆ RoHS Compatible



Applications

- ◆ 50G/25G Ethernet
- ◆ Infiniband QDR/FDR/EDR/HDR
- ◆ Data storage and communication industry
- ◆ Switch / router / HBA
- ◆ Enterprise network
- ◆ SAN
- ◆ Data Center Network

Product Description


The SFP56 passive cable assemblies are high performance, cost effective I/O solutions for 50G Ethernet. SFP56 copper cables allow hardware manufactures to achieve high port density, configurability and utilization at a very low cast and reduced power budget.

Recommended Operating Conditions


| Parameter | Symbol | Min | Typical | Max | Unit |
|-----------------------------|--------|-----|---------|-----|------|
| Storage Ambient Temperature | | -40 | | +85 | °C |

| | | | | | |
|----------------------------|------|------|-----|------|---------|
| Operating Case Temperature | Tc | 0 | | +70 | °C |
| Power Supply Voltage | Vcc3 | 3.14 | 3.3 | 3.47 | V |
| Power consumption | | | | 0.1 | W |
| Data Rate Per Lane | | 1 | | 28 | GBaud/s |

PCB Contact Configure (SFF-MSA Compliance)

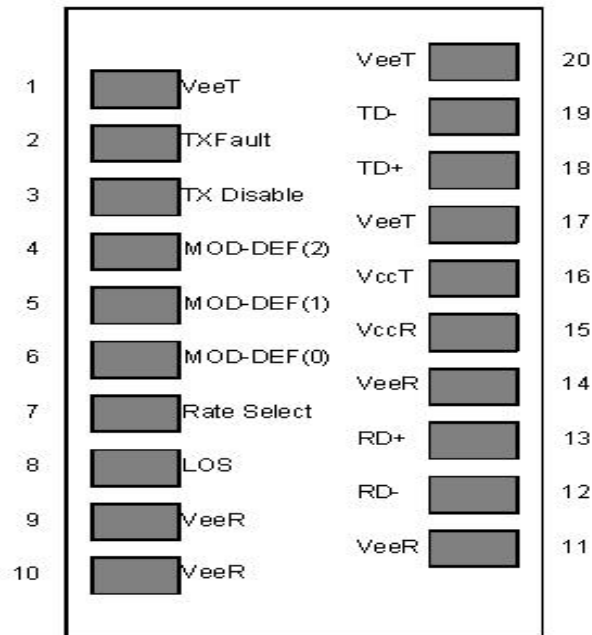

Mechanical Dimensions

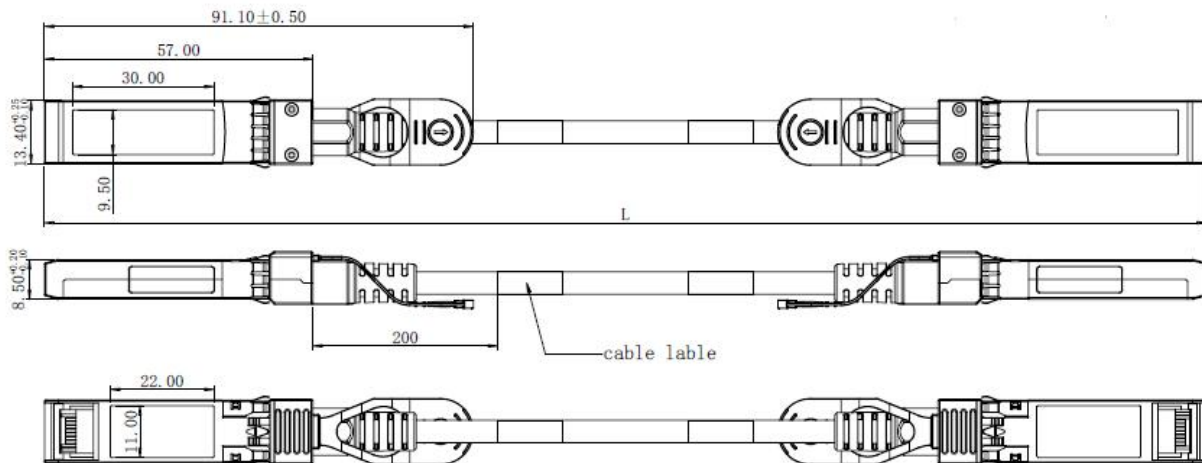

Performance and Test Description

| A | Time domain parameter | Test condition | Spec | | Equipment |
|---|---|--|---|--------------------------|-----------|
| 1 | Differential Impedance(bulk cable) | TDR Tr:25ps | 100+10/-5 ohms | | E5071C |
| 2 | Differential Impedance (Mated connector) | | 100+/-10 ohms | | |
| 3 | Differential Impedance(cable termination) | | 100+10/-15 ohms | | |
| 4 | Intra-skew | | L*15+20 | L: length(m) SPEC: ps | |
| B | Frequency domain parameter | Test condition | Test spec(dB) | f(GHz) | |
| 1 | SDD11/SD D22 | Freq:50MHz ~ 20GHz Points:1601 | -22+20/25.78*f*10 ⁽⁻³⁾ -10.66+14*log((f*10 ⁽⁻³⁾)/5.5) ≤5.3dB@13.26GHz | 0.05≤f<4.1 4.1≤f≤19 | E5071C |
| 2 | SCC11/SC C22 | Freq:50MHz ~ 20GHz Points:1601 | ≤-2dB | 0.2≤f≤19 | |
| 3 | SDC11/SD C22 | Freq:50MHz ~ 20GHz Points:1601 | -16+2*f/3 | 0.05≤f≤2 | |
| 5 | SCD21- SDD21 | Freq:50MHz ~ 20GHz Points:1601 | 10 as 0.01≤f < 12.89 -27+29/22*f*0.001 as 12.89≤f < 15.7 6.3 as 15.7≤f≤19 | 0.01≤f≤19 | |
| 6 | MDNEXT | Freq:50MHz ~ 20GHz Points:1601 | ≤-26dB@12.89GHz | 0.01≤f≤19 | |
| 7 | SDD21 | Freq:50MHz ~ 20GHz Points:1601 IF: 1KHz | -0.7*(f*10 ⁽⁻³⁾) ^{0.5} -0.3 *(f*10 ⁽⁻³⁾)-0.01*(f*10 ⁽⁻³⁾) ² <17.16dB@13.26GHz | 0.01≤f≤19 | |

Test Requirements and Methods

| Test Items | Specification | Test Method |
|------------------|---|--|
| Thermal shock | 5 cycles of a) -10°C for 30 minutes b) +70°C for 30 minutes | EIA-364-32C.Test condition I |
| Temperature Life | Subject mated Specimens to +70°C for 500 hours | EIA-364-17 method A, Test condition II, Test time condition C. |

| | | |
|----------------------------------|---|---|
| Humidity and Temperature cycling | Subject unmated specimens to 10 cycles (10 days) between 25 and 65oC at 80 to 100% RH | EIA-364-31 Method III, Test condition A |
| Mixed Flowing Gas | Subject specimens to environmental Class IIA for 7 days unmated, and 7 days mated. | EIA-364-65, Class IIA |

Regulatory Compliance

Gigalight GSS-PC560-XXC passive cable assemblies meet the requirements of the following standards:

| Feature | Standard |
|--------------------------|--|
| Electrical Safety | EN 62368-1: 2014 IEC 62368-1:2014 UL 62368-1:2014 |
| Environmental protection | Directive 2011/65/EU with amendment(EU)2015/863 |
| CE EMC | EN55032: 2015 EN55035: 2017 EN61000-3-2:2014 EN61000-3-3:2013 |
| FCC | FCC Part 15, Subpart B; ANSI C63.4-2014 |

Ordering information

Note: You can be customized diameter and distance.

| Part Number | GSS-PC560-XXC | | |
|------------------|---------------|----|----|
| Length (meter) | 1 | 2 | 3 |
| Wire gauge (AWG) | 30 | 30 | 26 |

Example:

GSS-PC560-01C/30AWG

GSS-PC560-03C/26AWG

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by GIGALIGHT before they become applicable to any particular order or contract. In accordance with the GIGALIGHT policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of GIGALIGHT or others. Further details are available from any GIGALIGHT sales



representative.

sales@gigalight.com.cn
<http://www.gigalight.com>

Revision History

| Version | Date | Description |
|---------|----------------|---|
| V0 | May-13-2021 | New release |
| V1 | Apr. 2nd, 2022 | Update differential impedance information |