

## G-A8R0080 DIN-Rail Unmanaged Industrial Switch



G-A8R0080 DIN-Rail Unmanaged Industrial Switch supports 8 10/100/1000BaseT ports, which is specially designed for harsh industrial environments, providing economic solutions for industrial Ethernet connections. The working temperature of the switch is -40 $^{\circ}$ C ~+85 $^{\circ}$ C.

G-A8R0080 DIN-Rail Unmanaged Industrial Switch adopts redundant dual power inputs, 9.6~60VDC and 18~30VAC, DIN-Rail mounted. With rugged aluminum alloy housing, IP40 protection class, the switch passed the high level tests of EMI/EMC, and has gone through strict aging test, meeting the requirements of security industry.

## **Features and Benefits**

- Multiple port options
- Backplane bandwidth up to 16Gbps
- Wide and varied power supply range
- Non-rust aluminum alloy housing and torx screws
- All ports support wire-speed forwarding and automatic turnover, supporting long-distance transmission
- Lightning protection: power supply ±4KV, RJ45 port ±4KV
- IP40 protection class
- Small and easy to install, plug and play without configuring
- Fanless design, wide working temperature and quiet operation

GIGALIGHT - 1 -



www.gigalight.com

Optical Interconnection Design Innovator

• MTBF ≥ 300,000h

GIGALIGHT - 2 -



www.gigalight.com

<b>Switch Properties</b>	
Backplane Bandwidth:	16Gbps
Switch Architecture:	Store-Forward
MAC Table Size:	4K
Buffer Size:	1.5Mbit
Exchange Rate:	148,800 pps/100M port; 1,488,000 pps/1000M port

Power Parameters		
Connection:		5-PIN terminal block
Input Voltage:		9.6 ~ 60VDC & 18 ~ 30VAC, dual inputs
Overload	Current	Supported
Protection:		
Reverse	Polarity	Supported
Protection		

Physical Performance	
Installation:	DIN-Rail Mounted
Housing:	Aluminum Alloy Housing
Protection Class:	IP40
Dimensions (W×H×D)	50mm × 110mm × 105mm
Weight:	< 0.5kg

Mechanical Characteristics	
Vibration:	IEC 60068-2-6
Shock:	IEC 60068-2-27
Free-all:	IEC 60068-2-31
Circuit Board:	Approved by IPC

Environment Limits		
Storage Temp	erature:	-40℃ ~ +85℃
Operating Ten	nperature:	-40℃ ~ +85℃
Ambient	Relative	5% ~ 95% (Non-condensing)
Humidity:		

GIGALIGHT -3-



www.gigalight.com


Electromagnetic Characteristics	
EMI:	FCC 47 CFR Part 15 Class A
	EN55032 Class A
	EN55035 Class A
EMC:	IEC(EN)61000-4-2, Class 4
	IEC(EN)61000-4-3, Class 3
	IEC(EN)61000-4-4, Class 4
	IEC(EN)61000-4-5, Class 4
	IEC(EN)61000-4-6, Class 3
	IEC(EN)61000-4-8, Class 5

Industrial Certification and Test	
Product Safety:	EN 62368-1
EMC:	EN 55032
	EN 55035
	EN IEC61000-3-2
	EN 61000-3-3
	FCC Part 15 Subpart B Class A
Others:	Test Report from Ministry of Public Security, Network Access License,
	RoHS

GIGALIGHT -4

## **Dimensions**

Unit: mm

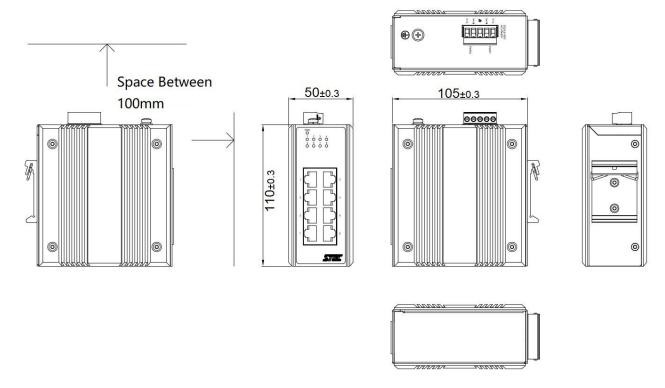

## **Ordering Information**

P/N	Description
	8-Port DIN-Rail Unmanaged Industrial Switch made from
	Anti-Corrosion aluminum alloy, support 8 10/100/1000BaseT ports.
G-A8R0080	DIN-Rail mounted. IP40 protection class. Operating temperature
	-40 $^{\circ}$ C ~ +85 $^{\circ}$ C. Dual redundant power inputs, 9.6~60VDC &
	18~30VAC.

GIGALIGHT -5